



LUXBEAM® RAPID SYSTEM – LRS-MC<sub>x</sub> WX NIR

SCALABLE SUBSYSTEM FOR LARGE BUILD AREAS

# Speed, resolution, and build area for PBF

The LUXBEAM® Rapid System LRS-MC<sub>x</sub> WX NIR removes the traditional limitations of polymer-based powder bed fusion (PBF). With unprecedented near-infrared power and flexible static or scrolling arrangement options, the subsystem opens new doors for high-throughput, high-resolution additive manufacturing using PBF.

**VISITECH**  
creating images – together



## LUXBEAM® RAPID SYSTEM – LRS-MC<sub>x</sub> WX NIR

### UNPRECEDENTED POWER

Visitech introduces the LRS-MC<sub>x</sub> WX NIR light engine, providing unprecedented near-infrared power of more than 100 W in the projected 2D image. For polymer-based powder bed fusion (PBF), the subsystem offers a path toward high productivity systems. An alternative to classical selective laser sintering (SLS) technologies – where the polymer material is heated up sequentially, point-by-point, and layer-by-layer, the LUXBEAM® Rapid System LRS-MC<sub>x</sub> WX NIR rationalizes towards a pure layer-by-layer approach, with instant 2D imaging.

### ACCELERATING POWDER BED FUSION

The liquid-cooled LRS-MC<sub>x</sub> WX NIR modules offer stackability for stitched images in static, step-and-flash, or scrolling configurations. For single-pass linear motion systems, this enables the highest manufacturing throughput. In addition, alignment features grant pixel-precise alignment of the modules. Featuring the highly robust and reliable high-resolution DLP650LNIR WXGA chipset, the system operates with an external, fiber-coupled NIR laser in the 800-1200 nm range.

### **DIRECT IMAGE SINTERING (DIS): THE NEW PBF METHOD**

Visitech's new DIS concept uses DLP and powerful IR laser diode arrays to substantially increase print speed, resolution, and build area over traditional polymer PBF methods. Exposing the entire print layer in one shot is the critical driver of build speed. Applying Visitech's scrolling subsystem, stacking multiple, powerful IR light engines in a motion stage that scrolls them over a vast build area, effectively removes established polymer-based PBF limitations. With the DIS concept's ability to maintain high resolution across the build area, a world of opportunities opens for innovative system builders seeking actual mass production capabilities for their polymer powder bed fusion systems.

# Maximum throughput in powder bed fusion

### LUXBEAM® RAPID SYSTEM – LRS-MC<sub>x</sub> WX NIR

#### Recommended implementation

- Multihead scrolling systems
- Static systems

#### Resolution

- 1280 x 800 WXGA (NIR)

#### Laser Wavelengths

- 1064 nm
- Other configuration upon request

#### Optical Power Output

- Up to 100 Watts

#### Projection Lens Options

- 1.85x
- 3.7x
- 7.0x
- 16.0x

#### Electronics

- LUXBEAM® LB4800

**VISITECH**  
creating images – together



## UNIQUE LIGHT SOURCE

The LRS-MC<sub>x</sub> WX NIR light engine comprises Visitech's proprietary integrated laser diode module, IgnitIR®. The module provides maximum control in throughput and safeguards system components such as the DMD to perform their best – for static or dynamic implementations.

## ADVANCED CONTROLLER

The LAMA STANDARD software package and API allow you to choose any motion controller in their basic configuration for the LRS-MC<sub>x</sub> WX NIR. 10G bandwidth even allows streaming. For advanced users, the LAMA PRO software version allows advanced operation modes, including subpixelation (improved surface finish) and edge blending for perfect stitching. However, achieving maximum performance and complete functionality requires a dedicated motion controller configuration.



## LUXBEAM® LRS-MC<sub>x</sub> MOTION STAGE: PLUG-AND-PLAY SOLUTION FOR MULTHEAD SCROLLING


### ENLARGING THE BUILD AREA

While introducing multi-head scrolling as the most advanced solution for scaling up 3D print stereolithography systems productivity, Visitech adds a plug-and-play reference stage to its portfolio. It is designated for expert static 3D print machine developers and manufacturers, who will find that the LRS-MC<sub>x</sub> motion stage opens for new business opportunity exploration. Implementing scalable motion systems allows for enlarged build areas.

### FLEXIBLE MOTION STAGE PLATFORM

Designed for installation in bottom-up and top-down configurations, the motion stage rooms up to four LRS-MC<sub>x</sub> photoheads.

A wide projection lens selection enables various configuration options, allowing for seamless stitching of native images – with pixel pitch as small as 50 microns. The flexible platform of the motion stage is suitable for UV stereolithography and works equally well in polymer-based powder bed fusion installations.

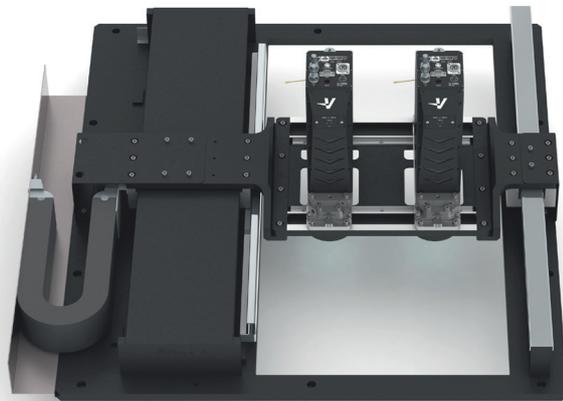

<b>Scroll Range</b> • 700 mm		<b>Clearance</b> • 500 mm		
<b>Scroll Speed</b> • 300 mm/sec		<b>Software</b> • Luxbeam® Additive Manufacturing Application (LAMA)		
Configuration with lens	Number of Photoheads	Pixel Pitch in Image (µm)	Total Pixel Count	Total Build Size (mm²)
LRS-MC <sub>x</sub> -WX NIR with 7.0x NIR	4	75	8.400 x 5.120	630 x 384
LRS-MC <sub>x</sub> -WX NIR with 16.0x NIR	2	175	3.200 x 2.548	560 x 446

# LUXBEAM<sup>®</sup> Rapid System – LRS-MCx WX NIR

Properties	
DMD Type	DLP650LNIR 0,65" WXGA (NIR)
Resolution	1280 x 800 px
Projector Output Power	Up to 100 W
Laser Wavelength	Integrated IgnitIR <sup>®</sup> module (1064 nm)
Power Uniformity	> 90% native
Dimensions w/o lens	305 mm (H) x 92 mm (W) x 240 mm (L)
Total weight w/o PSU	4 kg
Power consumption	650 W (per module)
Cooling system	Liquid cooling
Software	LAMA Standard (included) LAMA Pro (advanced features, available at a premium)

Electrical connections	Signal
Power supply	12 V DC
Ethernet	10 GbE
Communication	Ethernet (platform independent web interface)
LED Safety Switch	LED enable/disable
Electrical Sync I/O	RS 485
Optical sync I/O	820 nm multimode fiber

Lens Options	Magnification	Working Distance [mm]	Pixel Pitch in Image [µm]	Native Image Size [mm <sup>2</sup> ]
MCx 1.85x NIR	1.85 : 1	70.0	20.0	25.6 x 16.0
MCx 3.7x NIR	3.7 : 1	150.0	40.0	51.2 x 32.0
MCx 7.0x NIR	7.0 : 1	220.0	75.0	96.0 x 60.0
MCx 16.0x NIR	16.2 : 1	210.0	175.0	224.0 x 140.0

All specifications and features subject to change.